


Servo + Automated **3ply** Flute Laminator

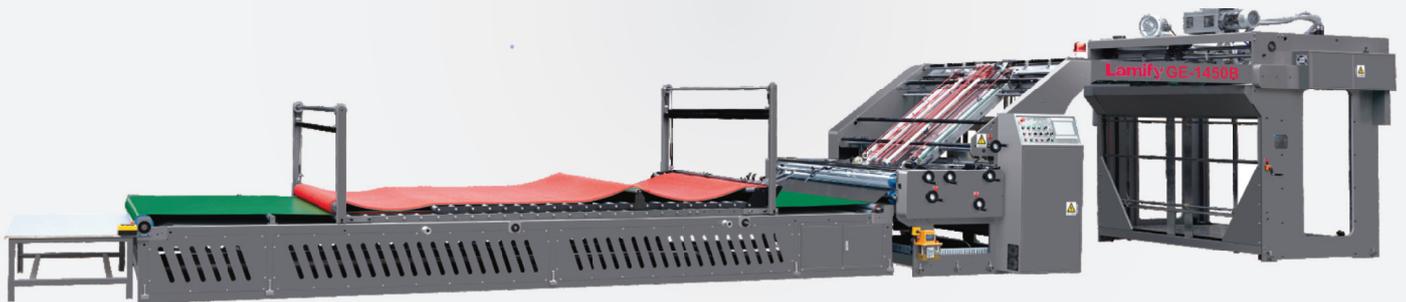

Features:

- Laminating speed: upto 153 m/min (13,000 sheets/hour)
- Change over in: 5 - 6 minutes
- Servo register control for Precision and ease of operation
- Anilox roller system for lower running costs and better box quality

Specifications:


Model	GE-1450B
Max. Sheet Size:	1450mm x 1450mm
Min. Sheet Size:	360mm x 360mm
Bottom Sheet Thickness:	300GSM ~ 10mm
Upper Sheet Thickness:	150GSM - 700GSM
Working Speed:	13,000 sheets/hour (153M/min) (Depends on sheet quality)
Laminating Accuracy:	±1.5mm Standard Sheet
Applicable Glue:	Starch & Synthetic
Machine Weight:	7000kg
Dimension (L x W x H):	15.4m x 2.3m x 2.55m
Power:	20kw
Applicable Sheet:	A,B,C,E,F, 3ply, 5ply corrugated board, and cardboard within above mentioned range

PRODUCT HIGHLIGHTS



Servo controlled registration

Full servo registers ensures reduced wastage and success in automation of the subsequent processes.

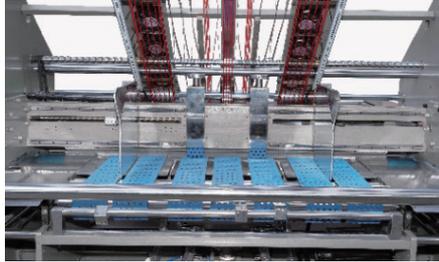

Feeding System for Bottom Paper

Adopting advanced high speed motion control servo tracking system to ensure the laminating accuracy.



Automatic Lubrication system

Enhances service life of rollers




Pre-stacking System

Pro-stacking system ensure job-change around 2-5 mins.



Operating System


Self-developed full servo control system in accordance with CE standard.

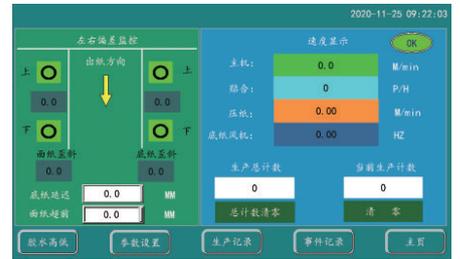

Simple operation interface

Easy to use HMI for reduced skilled-labour dependence

MACHINE LAYOUT

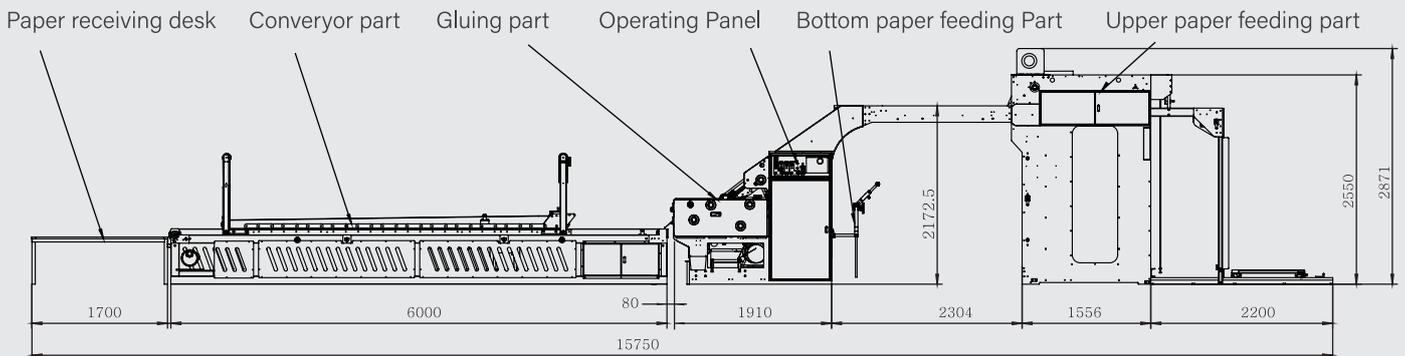

SUBA SOLUTIONS PRIVATE LIMITED

No. 1/479 - A, 8th Street, Eraniamman Koil, GST Road, Vandalur, Chennai - 600048, TamilNadu, India.

Phone: +91 98849 99585 E-mail: marketing@subasolutions.com

www.subasolutions.in



THE FINICHÉ SPECIALISTS®



[f](#) [t](#) [@](#) [v](#) [in](#) /subasolutions